




## Fog Nozzle 1 1/2" - Brass M2962



1.5" (38mm) Brass combination fog nozzle with bumper. The HNL-206T is UL / ULC Listed and FM Appro-ved and adjusts from straight stream to fog to shutoff.

The HN4L is rated for up to 150 psi and used in most industrial applications, including hose rack and reel assemblies. Specify regional hose thread.

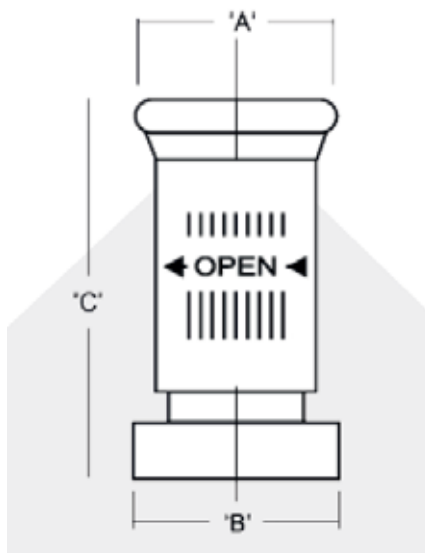

A = 2.45" (62mm)  
B = 2.47" (73mm)

C = 4.8" (122mm) Closed



[www.amerex-mexico.com](http://www.amerex-mexico.com)

[ventas@amerex-mexico.com](mailto:ventas@amerex-mexico.com)

Conmutador: (81) 1534.9214